





LASER RANGEFINDER INSTRUCTIONS

Power On & Take Measurement

Hold top  button for approx 1 sec. (Automatically shuts off after 1 minute, no manual off.)


Subsequent press and release of top  button takes a measurement.

Changing Modes


Pressing and releasing side  button switches between MG-Lock Measurement Mode (**MD**) which locks onto pin, and MG-Lock Recommended Distance Mode (**RD**) which locks onto pin & adjusts for slope.




Vibrating MG-Lock Confirmation Feature

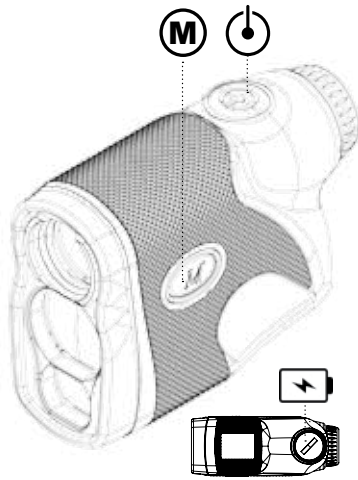With MG-Lock, a vibrating pulse gives tactile feedback that the rangefinder has locked onto the flagstick.

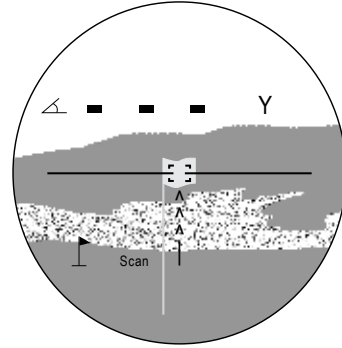


MG-Lock Recommended Distance Mode (Scan RD) (Slope)



Recommended Distance Mode (indicated by RD and  icon in viewfinder) adjusts distance based on angle of the slope. Aim, then press and release top  button. Distance and slope angle readings will alternate in viewfinder. (This mode also includes MG-Lock, indicated by  icon, which locks

onto a flagstick with something (like a bunker or tree) behind it. Example: MD mode will measure 150 yards for both the level and uphill distances resulting in the uphill shot falling short by several yards. RD mode will instead adjust the distance higher on the uphill shot, or lower on a downhill shot, telling you the distance the shot will play.

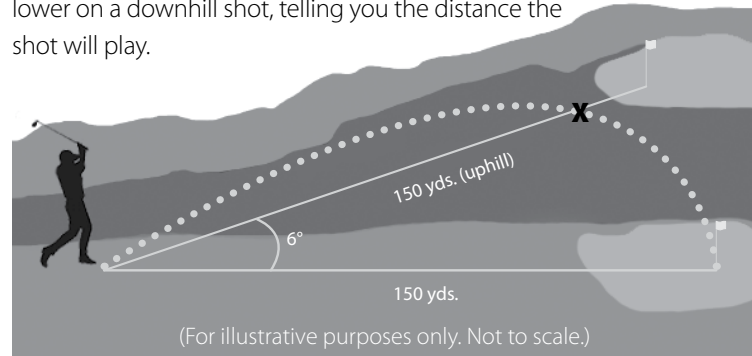




(For illustrative purposes only. Not to scale.)

(Continued on Reverse Side)

MG-Lock Measurement Mode (Scan MD)

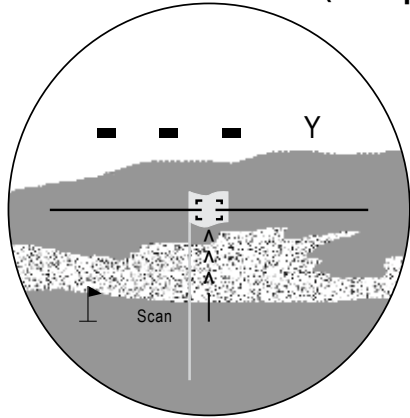(No slope)




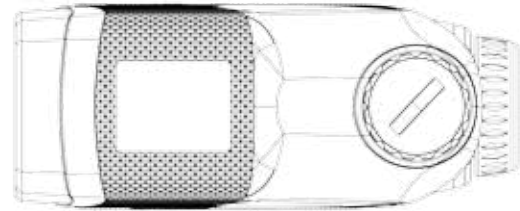
MG-Lock locks onto a flagstick with something (like a tree) behind it. It is indicated by the  icon. Aim, then press and release  button. Center target area will flash briefly while scanning and then return distance of object within it.

Specifications

- Slope Distance Recommendation
- MG-Lock Finds Pins In Front of Trees Etc...
- Vibrating MG-Lock Confirmation
- 21mm Objective Lens
- 6x Magnification Power
- 7.2° View Angle
- ±5 Adjustable Diopters (Glasses Unnecessary)
- Measurement in Yards
- Precision to +/- 1 Yard
- 3V Battery (CR2)
- IPX3 Water Resistance Rating
- Range: 6 to 800+ Yards
- Dimensions: 3.03" x 1.58" x 4.13"
- Weight: 5.8 oz

Low Battery Alert & Replacing Battery

When  icon is seen in lower part of viewfinder, 3V (CR2) battery should be replaced. From the bottom of the device, simply unscrew battery compartment cap, ensure that battery wrapper has been removed, insert battery negative terminal first (so positive terminal remains visible after insertion) and replace cap.



Cart Magnets & Strap

Two powerful magnets are embedded in the right-hand side of the unit. These can temporarily mount the device to a ferrous metal surface like a golf cart. (Please exercise caution before relying on this feature to hold unit especially when subjected to bumps, etc ... Not recommended in situations where a drop could be catastrophic.) A magnetic strap is also included to affix device to non-magnetic objects (such as a golf bag) as well as to use as a hand-hold.

